


Features

- Quad Independent Outputs
- 0~30 V & 0~5A Dual O/P
- 2.2~15V & 1 A Dual O/P
- Preset V & I Functions
- O/P On/Off Switch
- **Linear Type – Heavy Duty**
- Auto C.V. / C.C.
- 4 LED DPMs for display of V & I of 2 variable channels



MODEL >>		3003-4	3005-4
Output	Ch. 1 & 2	0 ~ 30V / 0 ~ 3 A	0 ~ 30V / 0 ~ 5 A
	Ch. 3 & 4	2.2 ~ 15 V / 1 A	
Line regulation (Ch. 1 & 2)	CV	≤ 0.01% + 3 mV	
	CC	≤ 0.2 % + 3 mA	
Load regulation (Ch. 1 & 2)	CV	≤ 0.01 % + 3 mV	≤ 0.02 % + 5 mV
	CC	≤ 0.2% + 3 mA	≤ 0.2 % + 5 mA
Ripple & Noise (Ch. 1 & 2)	CV	≤ 1 mV rms	≤ 2 mV rms
	CC	≤ 3 mA rms	≤ 6 mA rms
Load Reg., Ripple & Noise (Ch. 3 & 4)	≤ 25 mV / ≤ 2 mV rms (220 V AC I/P)		
Protection	Over load and reverse polarity protection.		
Display (Voltage & Current)	3 digits LED display		
Display Resolution	100 mV / 10 mA		
Display Accuracy	Real voltage and current output: ± (1% reading + 2 digits)		
	Preset voltage and current: ± (1% reading + 8 digits)		
Operating environment	0 °C ~ 40 °C, ≤ 80% RH		
Power source	AC110V/220V±10% selectable, 50/60Hz		
Accessories	Power Cord & Operation manual.		
Dimension	250 W x 150 H x 310 D (mm)		
Weight		8.5 Kg.	10 Kg.

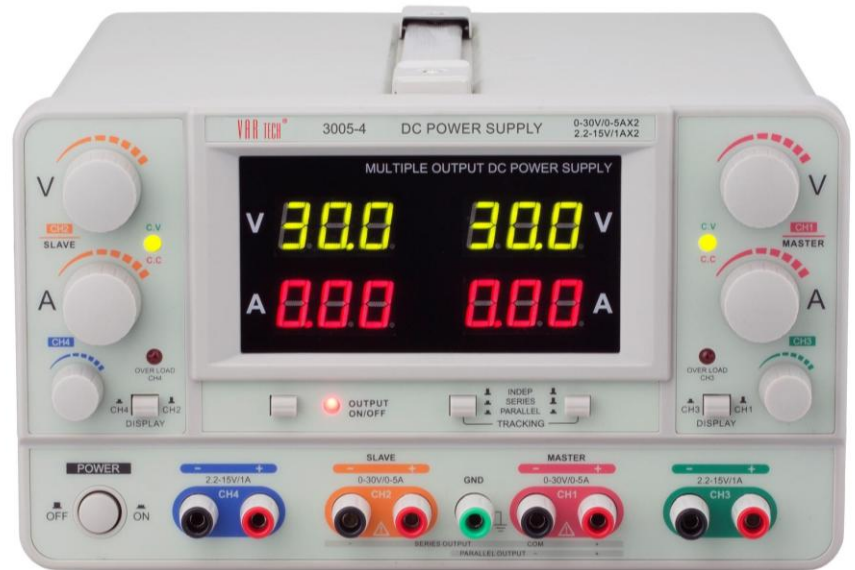