


## Features

- **Linear – Heavy Duty**
- **Single O/P**
- **Very Stable & Reliable**
- **Fully variable**
- **Preset V & I Functions (3020 & 6010)**
- **O/P On/Off Switch**
- **2 LED DPMs for display of V & I (3 Digits)**
- **4 Digits for 'A' (3010 & 6010)**

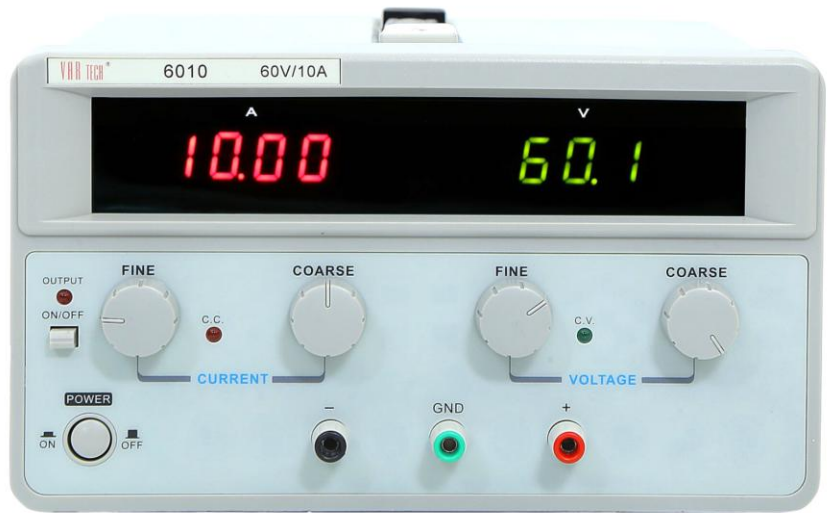

MODEL	3010	3020	6005	6010
O/P Voltage	0 ~ 30 V	0 ~ 30 V	0 ~ 60 V	0 ~ 60 V
O/P Current	0 ~ 10 A	0 ~ 20 A	0 ~ 5 A	0 ~ 10 A
Ripple & Noise ( $\leq$ ) rms	CV : 3 mV rms CC : 3 mA ( $I \leq 3$ A) / 10 mA ( $I > 3$ A)			
Line Regulation	CV : $\leq 0.01\% + 5$ mV (10 mV in Model 3020) CC : $\leq 0.2\% + 3$ mA			
Load Regulation	CV : $\leq 0.02\% + 5$ mV (10 mV in Model 3020) CC : $\leq 0.2\% + 3$ mA ( $I \leq 3$ A) $\leq 0.2\% + 5$ mA ( $I > 3$ A) $\leq 0.2\% + 15$ mA ( $I > 10$ A)			
These have full protection & can also be connected in Series / Parallel.				

### OTHER SPECIFICATIONS

<b>Input voltage</b>	:	230 V $\pm$ 10%, 50Hz $\pm$ 2Hz
<b>Protection</b>	:	Constant current and Overload Protection
<b>Presetting 'V' &amp; 'I'</b>	:	Facility Provided in Models 3020 & 6010.
<b>Indication accuracy</b>	:	Voltage : $\pm 1\% + 2$ digits & Current : $\pm 2\% + 2$ digits.
<b>Environment</b>	:	0 ~ + 40 °C      Relative humidity : < 80%
<b>Dimension &amp; Weight</b>	:	3010 & 6005 : 255 x 155 x 370 mm, 10 Kgs. 3020 & 6010 : 255 x 155 x 330 mm, 14 Kgs.
<b>Accessories</b>	:	Power Cord & Instruction Manual

*\* All Specifications & appearances are subject to change without prior notice*